

Product datasheet

Specifications



Motor circuit breaker, TeSys Deca, 3P, 4 to 6.3A, thermal magnetic, screw clamp terminals, rotary handle

GV2P10

Main

| | |
|---------------------------|-------------------------|
| Range | TeSys Deca |
| Product Name | TeSys GV2 TeSys Deca |
| Product Or Component Type | Motor circuit breaker |
| Device Short Name | GV2P |
| Device Application | Motor protection |
| Trip Unit Technology | Thermal-magnetic |

Complementary

| | |
|---|---|
| Poles Description | 3P |
| Network Type | AC |
| Utilisation Category | Category A conforming to IEC 60947-2 AC-3 conforming to IEC 60947-4-1 AC-3e conforming to IEC 60947-4-1 |
| Network Frequency | 50/60 Hz conforming to IEC 60947-4-1 |
| Fixing Mode | 35 mm symmetrical DIN rail: clipped Panel: screwed (with 2 x M4 screws) |
| Motor Power Kw | 2.2 kW at 400/415 V AC 50/60 Hz 3 kW at 500 V AC 50/60 Hz 4 kW at 690 V AC 50/60 Hz |
| Breaking Capacity | 100 kA Icu at 230/240 V AC 50/60 Hz conforming to IEC 60947-2 100 kA Icu at 400/415 V AC 50/60 Hz conforming to IEC 60947-2 100 kA Icu at 440 V AC 50/60 Hz conforming to IEC 60947-2 100 kA Icu at 500 V AC 50/60 Hz conforming to IEC 60947-2 6 kA Icu at 690 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Ics] Rated Service Short-Circuit Breaking Capacity | 100 % at 230/240 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 400/415 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 440 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 500 V AC 50/60 Hz conforming to IEC 60947-2 100 % at 690 V AC 50/60 Hz conforming to IEC 60947-2 |
| Control Type | Rotary handle |
| [In] Rated Current | 6.3 A |
| Thermal Protection Adjustment Range | 4...6.3 A conforming to IEC 60947-4-1 |
| Magnetic Tripping Current | 78 A |
| [Ith] Conventional Free Air Thermal Current | 6.3 A conforming to IEC 60947-4-1 |
| [Ue] Rated Operational Voltage | 690 V AC 50/60 Hz conforming to IEC 60947-2 |
| [Uij] Rated Insulation Voltage | 690 V AC 50/60 Hz conforming to IEC 60947-2 |

| | |
|---|---|
| [Uimp] Rated Impulse Withstand Voltage | 6 kV conforming to IEC 60947-2 |
| Phase Failure Sensitivity | Yes conforming to IEC 60947-4-1 |
| Suitability For Isolation | Yes conforming to IEC 60947-1 § 7-1-6 |
| Power Dissipation Per Pole | 2.5 W |
| Mechanical Durability | 100000 cycles |
| Electrical Durability | 100000 cycles for AC-3 at 415 V In 100000 cycles for AC-3e at 415 V In |
| Rated Duty | Continuous conforming to IEC 60947-4-1 |
| Tightening Torque | 1.7 N.m - on screw clamp terminal |
| Width | 45 mm |
| Height | 89 mm |
| Depth | 97 mm |
| Colour | Dark grey |

Environment

| | |
|--|---|
| Standards | EN/IEC 60947-2 EN/IEC 60947-4-1 |
| Product Certifications | CCC UL CSA EAC ATEX LROS (Lloyds register of shipping) BV RINA DNV-GL UKCA |
| Ik Degree Of Protection | IK04 |
| Ip Degree Of Protection | IP20 conforming to IEC 60529 |
| Climatic Withstand | conforming to IACS E10 |
| Ambient Air Temperature For Storage | -40...80 °C |
| Fire Resistance | 960 °C conforming to IEC 60695-2-11 |
| Ambient Air Temperature For Operation | -20...60 °C |
| Mechanical Robustness | Shocks: 30 Gn for 11 ms Vibrations: 5 Gn, 5...150 Hz |
| Operating Altitude | 2000 m |

Packing Units

| | |
|-------------------------------------|-----------|
| Unit Type Of Package 1 | PCE |
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 4.800 cm |
| Package 1 Width | 9.500 cm |
| Package 1 Length | 10.000 cm |
| Package 1 Weight | 322.000 g |
| Unit Type Of Package 2 | S02 |
| Number Of Units In Package 2 | 20 |
| Package 2 Height | 15.000 cm |

| | |
|------------------------------|------------|
| Package 2 Width | 30.000 cm |
| Package 2 Length | 40.000 cm |
| Package 2 Weight | 6.758 kg |
| Unit Type Of Package 3 | P06 |
| Number Of Units In Package 3 | 320 |
| Package 3 Height | 75.000 cm |
| Package 3 Width | 60.000 cm |
| Package 3 Length | 80.000 cm |
| Package 3 Weight | 114.608 kg |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.


[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance


 **Rohs Exemption Information** Yes

Certifications & Standards

| | |
|---------------------------------|---|
| Reach Regulation | REACH Declaration |
| Eu Rohs Directive | Compliant with Exemptions |
| China Rohs Regulation | China RoHS declaration Product out of China RoHS scope. Substance declaration for your information |
| Environmental Disclosure | Product Environmental Profile |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile | End of Life Information |

Thermal-Magnetic Tripping Curves for GV2ME and GV2P

Average Operating Times at 20 °C Related to Multiples of the Setting Current

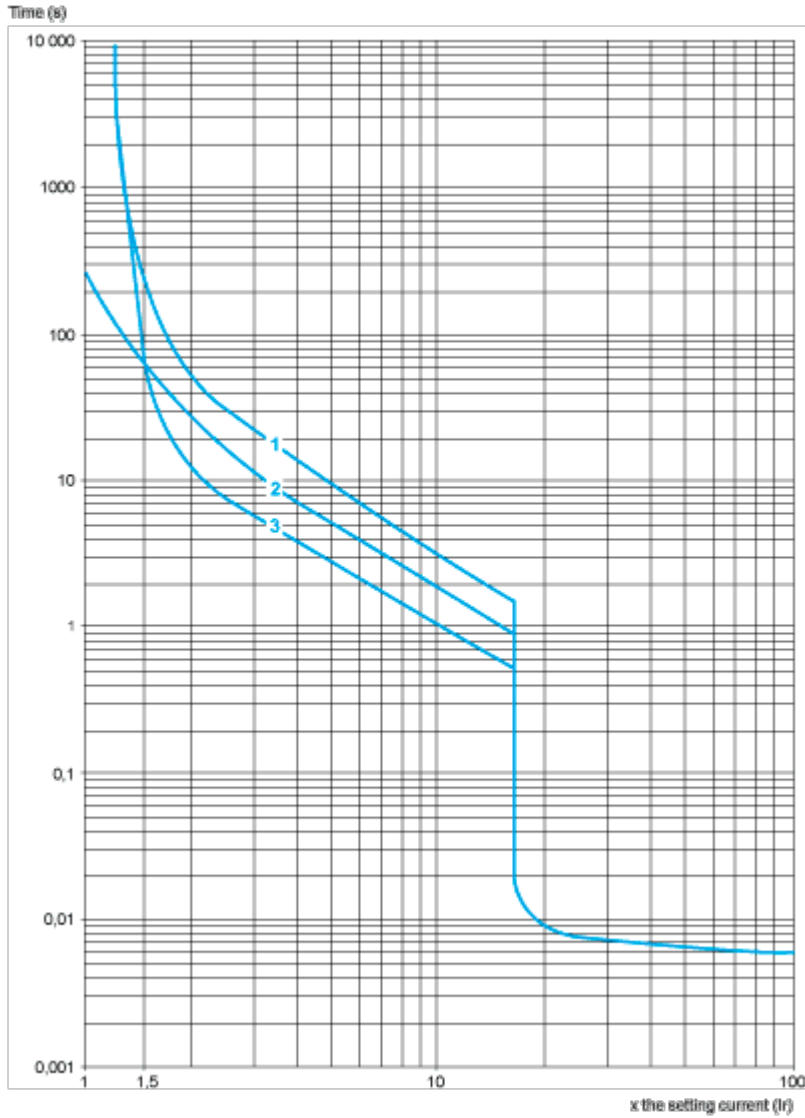


- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Current Limitation on Short-Circuit for GV2ME and GV2P (3-Phase 400/415 V)

Dynamic Stress

$I_{peak} = f(\text{prospective } I_{sc})$ at $1.05 U_e = 435 \text{ V}$

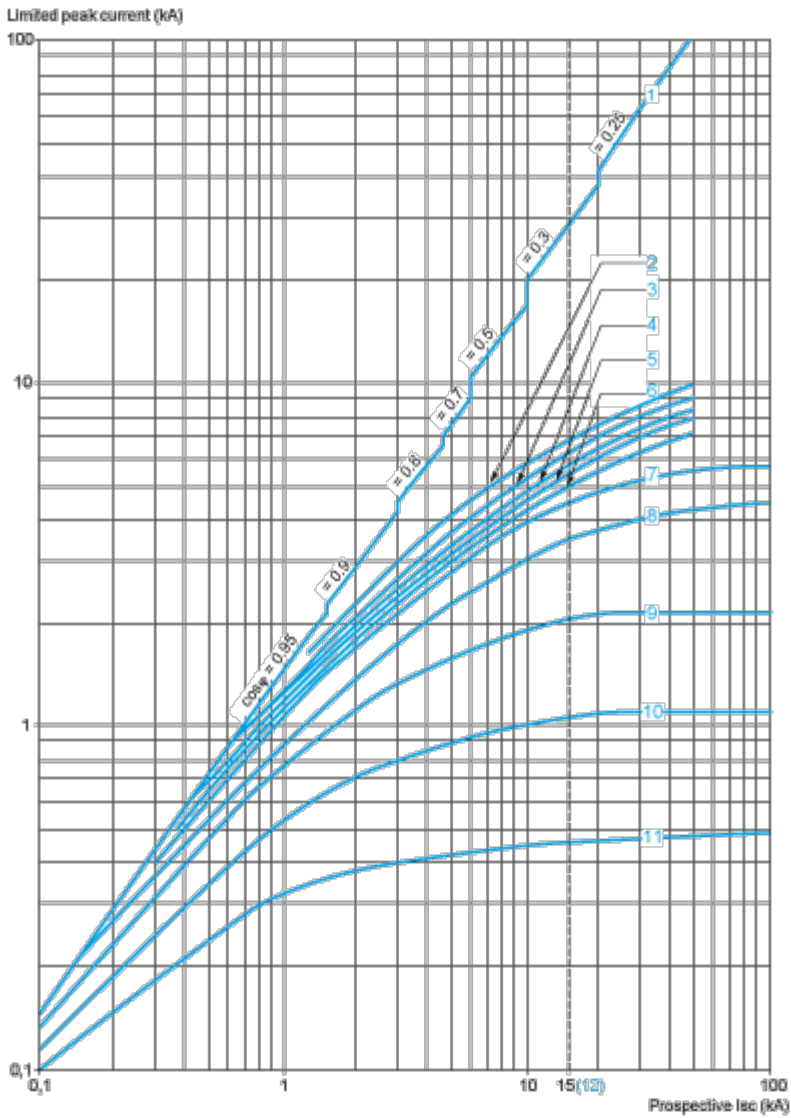


- 1 Maximum peak current
- 2 24-32 A
- 3 20-25 A
- 4 17-23 A
- 5 13-18 A
- 6 9-14 A
- 7 6-10 A
- 8 4-6.3 A
- 9 2.5-4 A
- 10 1.6-2.5 A
- 11 1-1.6 A
- 12 Limit of rated ultimate breaking capacity on short-circuit of GV2ME (14, 18, 23, and 25 A ratings).

Thermal Limit on Short-Circuit for GV2P

Thermal Limit in kA^2s in the Magnetic Operating Zone


Sum of $I^2dt = f$ (prospective Isc) at 1.05 Ue = 435 V

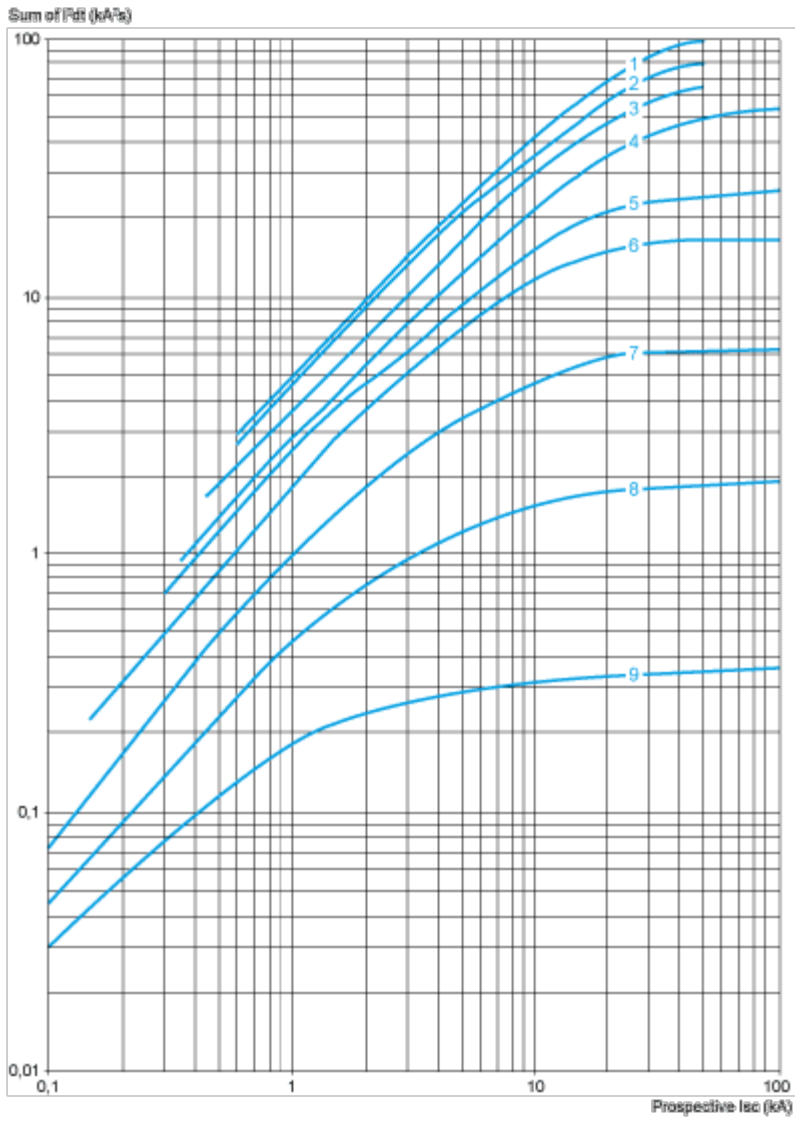


- 1 24-32 A
- 2 20-25 A
- 3 17-23 A
- 4 13-18 A
- 5 9-14 A
- 6 6-10 A
- 7 4-6.3 A
- 8 2.5-4 A
- 9 1.6-2.5 A
- 10 1-1.6 A

GV2P


On rail AM1 DE200, ED200 (35 x 15)




Panel mounted




On pre-slotted plate AM1 PA

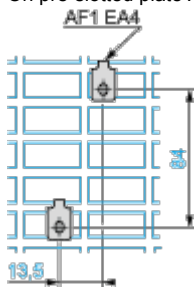

Adapter plate GK2AF01

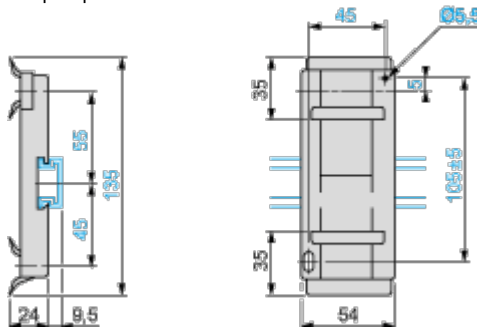


Combination GV2P + TeSys d contactor

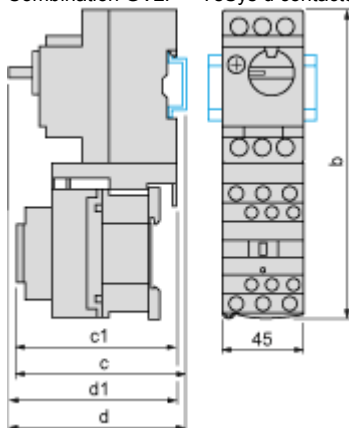


| GV2P + | LC1D09...D18 | LC1D25 and D32 |
|--------|--------------|----------------|
| b | 176.4 | 186.8 |
| c1 | 100.1 | 106.4 |
| c | 105.6 | 111.9 |
| d1 | 95 | 95 |
| d | 100.5 | 100.5 |

Mounting

Mounting of External Operator GV2APN01, GV2APN02 or GV2APN04 for Motor Circuit Breakers GV2P

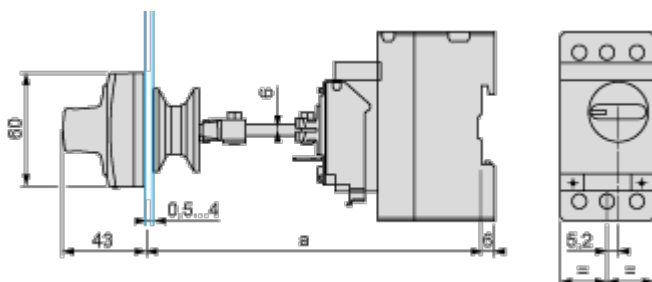


Door cut-out

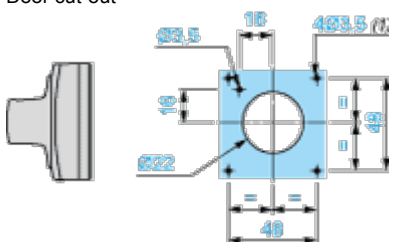

(1) For IP65 only.


Mounting of External Operator GVAPH02 for Motor Circuit Breakers GV2P

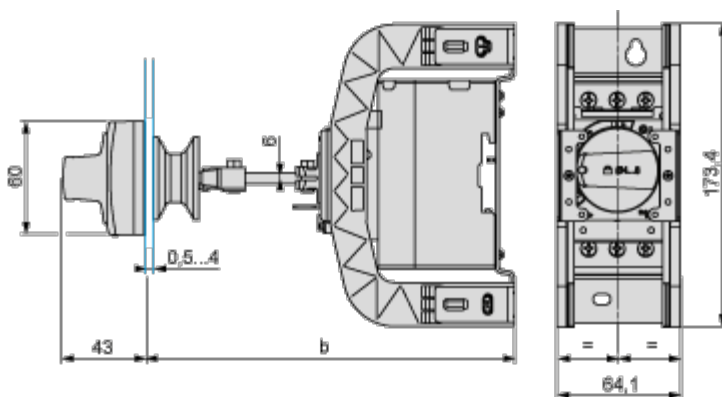

| | a | | b | |
|--------------------------------|---------|---------|---------|---------|
| | Minimum | Maximum | Minimum | Maximum |
| GV2APN _{..} | 140 | 250 | - | - |
| GV2APN _{..} + GVAPH02 | - | - | 151 | 250 |

| | a | | b | |
|------------------------------|---------|---------|---------|---------|
| | Minimum | Maximum | Minimum | Maximum |
| GV2APN.. + GVAPK11 | 250 | 434 | – | – |
| GV2APN.. + GVAPH02 + GVAPK11 | – | – | 250 | 445 |

Door cut-out

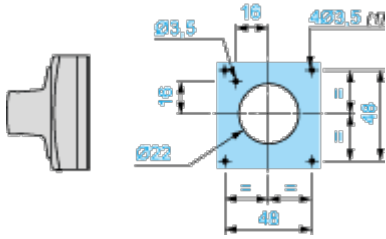

(1) For IP65 only.

GV2P**

